



MISCELLANEOUS
PRODUCTS

VELAJOINT

29071-29073-29074

POLYESTER FELT COVERED
WATERPROOFING RUBBER TAPES AND CORNERS

Technical data sheet

Description

Joint sealing waterproofing rubber tape covered on both sides with polyester felt improving adhesion to liquid membranes in general. The range includes special products such as VELAJOINT ANGLE AND VALJOINT EDGE in order to obtain closed angle or open edge structures.

Fields of application


Suitable as a waterproofing tape for separation joints or for the connection between horizontal and vertical joints.

Laying instructions

Lay on the first coat of wet liquid membrane until it is completely impregnated. TCF adhesive tape should be applied to the overlapping strips or between strips and corners.

Performance

- ✓ Excellent elasticity and mechanical strength

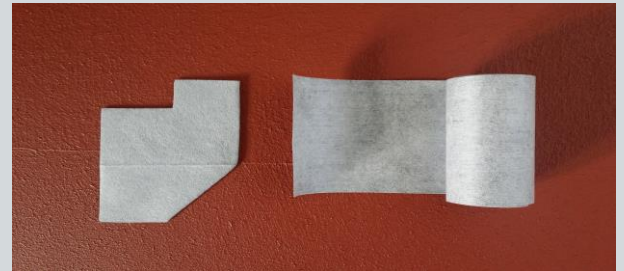

Chemico-physical properties

Physical Properties:	DIN	Value
Burst pressure max	Internal	2 bar
Breaking load longitudinal	DIN 527-3	104 N / 15 mm
Breaking load lateral	DIN 527-3	23 N / 15 mm
Extension break longitudinal	DIN 527-3	70 %
Extension break lateral	DIN 527-3	335 %
Power absorption at 25% Elasticity lateral	DIN 527-3	0,31 N / mm
Power absorption at 50% Elasticity lateral	DIN 527-3	0,34 N / mm
Resistance to water pressure	DIN EN 1928 (Version B)	> 1,5 bar
UV-Resistance: min.	DIN EN ISO 4892-2	500 h
Chemical Properties:	Resistance after storage over 7 days by room temperature in following chemicals	+ = resistant 0 = weakened - = non resistant
Hydrochloric acid 3%	Internal	+
Sulphuric acid 35 %	Internal	+
Citric acid 100g/l	Internal	+
Lactic acid 5%	Internal	+
Potassium hydroxide 3% / 20%	Internal	+ / +
Sodium hypochlorite 0,3 g/l	Internal	+
Salt water (20g/l Sea water salt)	Internal	+

29071		50 m	120/70mm	grigio
29071		10 m	120/70 mm	grigio
29073		scatola da 25 pezzi		grigio
29074		scatola da 25 pezzi		grigio

The above-mentioned values can be subject to update or change. IIVELA S.r.l. reserves the right to modify them at any time without prior notice. For a correct use of our products, see technical specifications. For further information or any special use, please contact our technical department. Any suggestions or technical information provided represent our best knowledge regarding product characteristics and use. Considering different applications and any possible interference of elements beyond our control, the buyer must declare under his own responsibility that the product is suitable for the intended use.