



MISCELLANEOUS
PRODUCTS

VELAPATCH

POLYESTER FELT COVERED
ADHESIVE BUTYL RUBBER SHEETS

Technical data sheet

Description

Polyester felt sheets coupled with butyl rubber adhesives.

Fields of application

Suitable as a waterproofing connector for drains and outlets for continuous waterproofing systems obtained by means of liquid membranes.

Easily workable product ensuring excellent adhesion to polymer membranes and plastic or metal surfaces.

Laying instructions


Before laying, make sure that the surface is accurately cleaned, removing dust residues or any other friable material.

Clean the internal surface of the drain pipe (PVC or metal surface) removing dust or any other oily substance.

Lay the sheet on the drain pipe to be waterproofed, making a cross cut as large as its diameter, pressing cutting edges towards the inner side of the hole to let them adhere to the surface.

Performance

- ✓ Excellent elasticity and adhesion to different surfaces

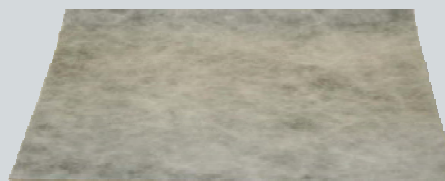

Chemico-physical properties

Parameter	Value
PEEL TEST CONDUCTED ON PVC PIPES	>10N / 20mm
COLOUR	Grey
LENGTH AND WIDTH DIMENSIONS	370mm x 370mm
THICKNESS OF APPROXIMATELY	1,3 mm
WEIGHT	217 gr
TEMPERATURE RANGE	-5°C / +60°C

Store in a dry place out of direct sunlight. To be used within 24 months of the purchase date.

The above-mentioned values can be subject to update or change. IIVELA S.r.l. reserves the right to modify them at any time without prior notice. For a correct use of our products, see technical specifications. For further information or any special use, please contact our technical department. Any suggestions or technical information provided represent our best knowledge regarding product characteristics and use. Considering different applications and any possible interference of elements beyond our control, the buyer must declare under his own responsibility that the product is suitable for the intended use.